


REMARKS

Claims 1 - 5 are pending in this application. By this Amendment, claims 1 - 4 are amended to conform to U.S. practice, for example by eliminating multiple dependencies, and new claim 5 is added. Support for new claim 5 is found in original claim 4. The specification is also amended to correct typographical errors appearing therein. No new matter is added by this Amendment.

Prompt and favorable consideration on the merits is respectfully requested.

Should the Examiner believe that anything further would be desirable in order to place this application in even better condition for allowance, the Examiner is invited to contact the undersigned at the telephone number set forth below.

Respectfully submitted,

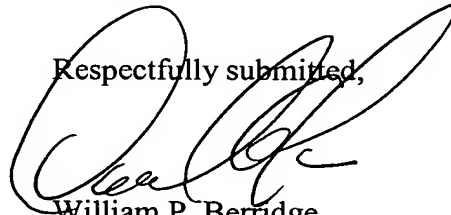

William P. Berridge
Registration No. 30,024

Daniel A. Tanner
Registration No. 54,734

WPB:JBK/phd

Attachments:

Marked-up Copy of Specification
Substitute Specification
Abstract

Date: May 19, 2006

OLIFF & BERRIDGE, PLC
P.O. Box 19928
Alexandria, Virginia 22320
Telephone: (703) 836-6400

<p>DEPOSIT ACCOUNT USE AUTHORIZATION Please grant any extension necessary for entry; Charge any fee due to our Deposit Account No. 15-0461</p>

PROCESS FOR MAKING DAPBI-CONTAINING ARAMID CRUMBS

CROSS-REFERENCE TO RELATED APPLICATION

This application is a U.S. national stage application of PCT/EP2004/012760, filed November 11, 2004, which PCT application is incorporated herein by reference in its entirety.

BACKGROUND

The invention relates to a method for obtaining a composition comprising an aromatic polyamide containing para-phenylene terephthalamide and 2-(p-phenylene)-benzimidazole terephthalamide units by copolymerizing para-phenylenediamine (PPD), 5(6)-amino-2-(p-aminophenyl)benzimidazole (DAPBI); and terephthaloyl dichloride (TDC) in a mixture of N-methyl pyrrolidone (NMP) and calcium chloride, and to said composition. The invention further relates to a method for making purified aromatic polymer from said composition.

Methods for making aramid polymers are known in the art. For instance, in US 4,172,938, an aromatic polyamide was described to be made by polymerizing a mixture of diamines and an aromatic dicarboxylic acid dihalide in a mixture of N-methyl pyrrolidone and calcium chloride. In example 34 of this reference, the polymerization reaction is performed with a mixture of para-phenylene diamine (PPD) and 5-amino-2-(p-aminophenyl)-benzimidazole (DAPBI), and terephthaloyl dichloride (TDC) in N-methyl pyrrolidone (NMP) containing 2 wt.% of calcium chloride (CaCl₂). The product was obtained as a powdery clay-like ~~materials-material~~ for which filtration was problematical problematic. It was disclosed that products according to this reference in more general terms are obtained as slurry, paste, powder, or agar.

Other processes for making spin dopes of DAPBI-containing polymers are known from US 5,646,234 and US 4,018,735. US 5,646,234 discloses a process for making a spin dope wherein the use of alkali metal halides, among which also calcium chloride, as additive is disclosed. However, very particular preference is given in using no additives, and in conformity herewith the specific examples do not use such additives. Moreover, if calcium chloride is applied according to this reference the amount thereof can be substantially higher than allowable for preventing formation of paste and the like. None of the examples of US 4,018,735 disclose the use of calcium chloride, nor is such specific additive suggested in

combination with N-methyl pyrrolidone, and for that reason the polymers of this reference will be obtained in the form of a paste, powder, and the like.

SUMMARY

It is an object of the present invention to provide ~~condition~~ conditions for performing such reaction and obtaining a composition in the form of a crumb or a crumb-like material. The term crumb or crumb-like as used in this invention means that the polymer mixture contains breakable clumps or particles, which are not sticky and have a mean particle size greater than 100 μm , usually greater than 1 mm. The term crumb in relation to this invention is defined as non-sticky particles, i.e., particles as in powders that do not stick together and remain free to ~~from~~ each other, at least 95% of which ~~has~~ have an average diameter 0.7-15 mm, preferably 1-7 mm.

DETAILED DESCRIPTION OF EMBODIMENTS

Such crumbs are known from the process of preparing of fully aromatic polyamides based on e.g., PPD and TDC, which products are known under the trade names ~~Twaron~~ TWARON® (Teijin Twaron) and ~~Kevlar~~ KEVLAR® (DuPont). After polymerization in NMP/ CaCl_2 , a crumb is obtained which can be easily coagulated, washed, and dried, and the product obtained can be dissolved in sulfuric acid and shaped into a desired form, like fibers or films.

The monomer of interest, DAPBI (5(6)-amino-2-(p-aminophenyl)-benzimidazole; CAS reg. no: 7621-86-5), is added to the diamine mixture with the objective to obtain a suitable polymer solution right after polymerization with e.g., PPD and TDC, which can be directly shaped into fibers or films, whereby DAPBI is seen as a suitable comonomer to keep the aramid polymer in solution. ~~It was now found that by~~ By selecting a specific ratio of PPD, DAPBI, and CaCl_2 , the formation of powders, paste, dough, and the like ~~could~~ can be prevented.

To this end, the invention relates to a method for obtaining a composition comprising an aromatic polyamide containing para-phenylene terephthalamide and 2-(p-phenylene)benzimidazole terephthalamide units by copolymerizing:

- i) a mole % of para-phenylenediamine;
- ii) b mole % of 5(6)-amino-2-(p-aminophenyl)benzimidazole; and
- iii) 90-110 mole% of terephthaloyl dichloride

in a mixture of N-methyl pyrrolidone and containing c wt.% of calcium chloride, wherein c is within the range from 1 to 20, and wherein the ratio a : b ranges from 1 : 20 to 20 : 1, a + b is

100 mole%, and i), ii), and iii) together comprise 1-20 wt.% of the mixture, characterized in that ~~wherein~~ the product b.c is at least 50 and less than 215 and that the composition is a crumb with a relative viscosity η_{rel} of at least 4, wherein the crumb is defined as non-sticky particles at least 95% of which having an average diameter of 0.7-15 mm.

5 It is ~~one of the other objectives~~ another objective of the present invention to obtain crumbs comprising a polymer with a sufficient high relative viscosity η_{rel} . Relative viscosities η_{rel} of at least 4, more preferably between 4 and 7, most preferably at least 5 can be obtained according to the method of the invention. It is further preferred to have a mixture for copolymerization wherein b.c is at least 80.

10 In another object of the invention a method for obtaining a purified aromatic polyamide is obtained by coagulating and washing the obtained crumb with water, followed by drying. The drying step can be performed according to standard procedures, such as ambient conditions, or at elevated temperature and/or lowered pressure. ~~The thus~~ Thus, the obtained material is suitable for making a spin dope by dissolving it in a solvent, for instance
15 sulfuric acid, NMP, NMP/ CaCl_2 , dimethylacetamide, and the like. The dope can be used to manufacture formed articles, such as fibers, films, and the like.

In the following experiments, the aspects of the invention are exemplified.

General polymerization procedure

DAPBI (ex Spektr T.T.T., Russia) was dried under vacuum for 1 h at 160° C.
20 PPD (Teijin Twaron), TDC (freshly distilled), NMP/ CaCl_2 and NMP (both ex Teijin Twaron) were used as received (moisture content 80 ppm).

The glassware was pre-dried for 1 h in an air circulation oven at 120° C. A clean and dry 2 ~~l~~ liter flask was supplied with a mechanical stirrer, N_2 -inlet and outlet, and vacuum supply. Generally, the N_2 -stream is between 40 – 60 ml/min. A large part (400 ml) of
25 the solvent and the precisely pre-weighed amines were carefully brought in the reactor. The reactor was closed and purged two times with nitrogen. The mixture was stirred for 30 min at 150 rpm and heated to 60° C and mixed for 0.5 h to dissolve or disperse the amines properly. The flask was cooled with ice/water to 5 – 10° C. After removing the coolant, the stirrer velocity was set at 320 rpm and a precisely pre-weighed amount of the acid chloride was
30 brought into the vessel through a funnel. In all cases the mol ratio of the total number of amines and the acid chloride equals one. The flask, which contained the acid chloride and the funnel, ~~were~~ was rinsed with the remaining solvent (50 ml). The vessel was closed and the mixture was allowed to react for at least 30 min (nitrogen flush between 40 – 60 ml/min). The stirring was stopped and the reaction vessel was removed.

The crumbed product together with demi-water was gently added into a Condux LV15 15/N3 coagulator and the mixture was collected on an RVS filter. The product was washed 4 times with 5 l of demi-water, collected in a 2 l glass beaker and dried under vacuum for 24 h at 80° C.

5 A sample was dissolved in sulfuric acid at room temperature. The flow time of the sample solution in sulfuric acid 96% (0.25 % m/V) was measured at 25° C in an Ubbelohde viscometer. Under identical conditions the flow time of the solvent was measured as well. The relative viscosity was then calculated as the ratio between the two observed flow times.

10 Results:

After addition of the TDC, the temperature increased rapidly and could reach its maximum between 40° and 70° C.

The Table shows some examples in which the polymer mixture turned into a crumbed mass, which could easily be coagulated and washed. To obtain crumbs the DAPBI
15 content, monomer concentration, and the CaCl₂ concentration must be balanced according to the invention. The relative viscosity, inherent viscosity, and appearance (crumb or others) are given in the Table. PPD, DAPBI and TDC together comprise about 10 to 12 wt.% of the mixture.

In comparative examples I – III, the polymer mixture was rendered as a dough
20 polymer mass or as rubbery “chewing gum-like” mass, due to the high CaCl₂ content. In Comparative Example IV, ~~first~~ first a precipitate was formed, which was later converted to a dough-like mass. The CaCl₂ content was too low to obtain a crumb. Comparative Example V (according to US 4,172,938 having an inherent viscosity of 1.93, see Table) resulted in a powdery material, which after coagulation was very difficult to filter. It behaved like a clay-
25 like material.

Table

Examples	PPD a mole%	DAPBI b mole %	CaCl ₂ c wt. %	b.c	η_{rel}	η_{inh}	crumb
1	90	10	10.40	104.0	6.29	6.46	yes
2	90	10	11.55	115.5	5.93	6.2 [#]	yes
3	80	20	9.85	197.0	5.38	5.92	yes
4	80	20	10.28	205.6	4.10	5	yes
5	60	40	4.77	190.8	5.69	6.01	yes
6	33	67	3.09	207.0	6.98	6.45	yes
7	30	70	2.82	197.4	6.2*	6.3 [#]	yes
Comparative Examples							
I	80	20	11.55	231.0	4.59	5.3 [#]	dough/paste
II	60	40	5.49	219.6	5.87	6.2	dough/paste
III	33	67	4.56	306.9	2.75	3.58	dough/paste
IV	33	67	2.88	193.0	2.31	3.04	gel ⁺
V	80	20	1.96	39.2	1.56	1.93	powder

* average of 3 values

calculated value

⁺ gel with precipitated particles

The Table shows the advantageous properties when the conditions of the invention are satisfied. For instance, Comparative example V (according to US 4,172,938) has a product b.c value outside the claimed range (39.2), but a relative viscosity below 4 (1.56). No crumb is formed, but a powder is formed (having a particle size far below the average diameter 0.7 mm).